

Water Demand Management Optimization Methodology
Kenneth Friedman, James Heaney, Miguel Morales, and John Palenchar
Jour. American Water Works Association
Accepted for Publication on 3/7/11

ABSTRACT

Water demand management can be a viable alternative to meet future water needs. In contrast to traditional supply augmentation options, demand management options include specifying and/or replacing many small end uses which individually minimally impact overall water use but which collectively can constitute significant aggregate reductions in demand.

This paper outlines a systematic procedure to quantify savings potential of all single family residential indoor end using devices of a given utility, and then select the optimal blend of retrofits to achieve a specified goal. Three steps are used to quantify savings potential of all end use devices are quantified using a three step process. First, a utility's current end-use-fixture inventory and associated water usage is estimated from parcel-level data for each single family residence. Next, these customers are clustered into relatively homogeneous water use categories based on the age of the dwelling unit and the number of bathrooms. Then, water savings is calculated directly as the difference between current and proposed usage with implementation of a management option for each group. This information is used to develop performance functions that estimate total water savings as a function of the number of fixture retrofits for each group.

The performance functions are combined with information on the costs of the retrofits and the expected monetary savings from reduced water demand. Linear

programming is used to find the optimal mix of demand-management options to meet a specified goal.

As an example, this methodology was applied to toilet retrofit options within Gainesville Regional Utilities. The optimal demand-management strategy indicated that the net benefits were largest for the 9.4% of the customers having older water using fixtures-in one bathroom homes with a blend of 1.6- and 0.8-gallon-per-flush toilets. GIS spatial data can then be used to identify priority retrofit areas.

INTRODUCTION

Demand management can be a viable alternative to augmenting the supply system to meet future water needs. Demand management should be compared to traditional supply augmentation methods when deciding the extent to which it is a viable option. Methods of analysis are well established for choosing among supply augmentation options such as well field development, reservoir and pipeline construction, and desalination. Demand management is an emerging alternative, in which several case studies have been conducted illustrating significant demand reduction from various strategies, including technological improvements, behavioral marketing campaigns, and adjustments of water pricing. The major difference between traditional supply augmentation and demand management is that traditional supply options are capital intensive with long service lives, so capacity expansion is done in discrete, relatively large, increments. Demand management options include many small changes which reduce water use for individual customers by a few gallons per day but which collectively can bring about significant aggregate reductions in demand if they are applied to a significant portion of the utility's customers.

Recent advances in database availability, including an associated Geographic Information System (GIS), make it possible to do a bottom-up evaluation of water demand patterns across the utility and systematically determine the potential savings for all single family indoor retrofit options within a given utility. An optimal mix of demand-management strategies can then be selected by comparing each individual demand-management control with a few large supply augmentation options. Existing water-demand-management models rely on trial-and-error procedures to estimate the optimal mix of control options with little or no information for the actual identification of individual fixture savings potential. .

This bottom up optimization method has been developed as part of activities of the Conserve Florida Water Clearinghouse (www.conservefloridawater.org) to develop software to identify the best mix of single family residential end-use options based on the desired objective. The objective function for the optimization can vary depending on the interests of the utility, including maximizing net benefits in comparison to other supply options, minimizing the cost of meeting a target water reduction, or maximizing water savings subject to a budget constraint.

The bottom-up approach is feasible in Florida thanks to the availability of attribute data for every one of Florida's 8.8 million property parcels. Due to Florida's government in the sunshine legislation, the state may be unique in reporting annually the attributes of all 8.8 million parcels in its 67 counties. Additional information regarding these parcels is available from the property appraisers' databases for each of Florida's 67 counties although this information varies from county to county. This parcel-level information is used, along with U.S. Census block data on persons per dwelling unit, and

customer level water utility billing data, where available, to find the optimal mix of end-use options.

This methodology uses three core principles for evaluating end-use options: 1) determining existing end-use devices and water use for every customer in a utility; 2) directly determining water savings and associated costs with less water intensive end use devices; and 3) determining the optimal mix of end-use demand management options and identifying the highest priority customers to target. These methodologies focus on determining the optimal mix of technological fixture end use improvements, assuming that behavior and price of water are constant.

WATER DEMAND MANAGEMENT METHODOLOGY

The AwwaRF residential (Mayer et al. 1999 and Aquacraft, Inc. 2005) and Commercial/Institutional (Dziegielewski et al. 2000) end-use studies provide fundamental information regarding the nature of urban water use for individual end uses. End-use analysis provides an essential inventory of existing and projected water use devices and their attributes, e.g., 10,000 single-family residential customers with one bathroom that have 1.28-gallon-per-flush toilets. The decision variables in end-use optimization are the end-use devices, e.g., replace five thousand 3.5-gallon-per-flush toilets in one-bath houses with 1.28-gallon-per-flush toilets. Maddaus and Maddaus (2004) describe their proprietary Least Cost Planning Demand Management Decision Support System (DSS) that includes end use evaluations. This model has been widely applied in the United States and in Australia. White et al. (2004) describe the development of the Sydney Water End Use Model and its application in Australia. Maddaus and Maddaus (2006) provide a detailed description of water conservation

planning in the *AWWA Manual of Practices M52*. Maddaus (2009) presents a detailed description of his end-use DSS to regional water supply planning in the East Bay Municipal Utility District. Green (2010) presents information regarding the expected costs, savings, and service lives for a variety of demand-management options based on information provided by William Maddaus.

Existing top-down procedures rely on aggregate water system data to estimate end uses. These highly aggregated average values are of little use in estimating the variability of savings that exists across the utility because of differences in water use patterns of existing fixtures. Savings depend on the water use of existing and proposed fixtures. Using a single “average savings” for all fixture replacements provides only a very crude estimate of the actual savings rates and no information regarding the market share of this option.

The Conserve Florida Water Clearinghouse (www.conservefloridawater.org) has developed a bottom-up end-use optimization and decision support system model for evaluating water demand management options for utilities in Florida. The basic reporting unit is the individual parcel. The application of this methodology to the single-family residential sector using Gainesville Regional Utilities will be described as an example. A bottom-up methodology is preferable to reliance on a top-down approach since it provides a basis for evaluating customers individually or in smaller groups. The main limitation to bottom-up analyses has been lack of data at these disaggregated scales. Polebitski and Palmer (2010) evaluate water demand forecasting using the 100 census tracts that comprise Seattle, Washington. Chen (1994) argues that census block groups are preferable to census tracts due to the increased spatial disaggregation. The findings of

this study suggest that spatial disaggregation is primarily limited by data availability. Hazen and Sawyer and PMCL (2004) used 1,500 U.S. Census Traffic Analysis Zones (TAZs) as the basic spatial unit in analyzing water use in the Tampa Bay area. They aggregate customer-level water use data to the TAZ levels for use in their regression models. The average number of people per spatial unit in Florida is shown in Table 1. Census tracts with about 4,000 people provide limited ability to do end-use evaluations using relatively homogeneous neighborhood clusters. These exceptional databases provide the basis for accurate end-use evaluations at the parcel-level.

Table 1. Levels of aggregation by spatial unit for Florida based on 2009 conditions

Unit	Value	Persons/ Unit
Population	18,800,000	1
Parcels	8,800,000	2.14
Census Blocks	362,499	51.9
Traffic Analysis Zones	12,747	1,475
Census Tracts*	4,700	4,000
Utilities	2,633	7,140
Counties	67	280,597

*Value based on 4,000 persons per Census tract

The Conserve Florida Water Clearinghouse (www.conservefloridawater.org) has developed its water conservation software, called *EZ Guide 2*, using the 8.8 million parcels in Florida as the basic reporting unit. Utilities or the water management districts provide the Clearinghouse with the utility boundaries as GIS shapefiles, which are used to determine which parcels to analyze for a given utility. *EZ Guide 2* uses this information to generate estimates of population, heated area, and irrigable area for each of 60 urban water land use types based on the land use codes of the Florida Department

of Revenue. This parcel-level information is used to do a complete bottom-up evaluation of demand management options.

PARCEL-LEVEL END USE EVALUATION

The basic structure of the database for parcel-level end-use evaluation can be represented as a single m by n matrix, \mathbf{A} , with individual elements, a_{ij} . This single flat file format provides a convenient computing platform within contemporary spreadsheets such as Excel 2007, which is the application EZ Guide 2 uses. The database includes all 8.8 million parcels in Florida. The parcels within an individual utility can be determined as the union of Florida parcel geometries and utility boundary geometries using GIS.

The only block level estimate included in the database is the estimated persons per residence that comes from U.S. Census Block data. From Table 1, a Census block contains about 20 to 25 parcels, so it should provide a fairly reliable estimate of persons per residence. An average of 2.5 persons per residence has been shown to be fairly stable spatially and temporally over the last few decades (Smith et al. 2002, Friedman 2009). Due to this stability, U.S. Census persons per residence data at the Census Block level of aggregation can be used without adjusting for the 10-year lag time between the Censuses. The FDOR data are updated annually. These data are generally of high quality since they are carefully audited to ensure accurate property value assessments.

The illustrative application presented in this paper is to $m = 30,903$ SFR parcels with 46 attributes served by Gainesville Regional Utilities (GRU) in Gainesville, Florida shown in Table 2. Although only SFR will be analyzed in this paper, the same attributes

can be obtained and analyzed for other sectors. GRU is located in Alachua County, Florida. The 46 attributes for the parcel-level database for GRU that are shown in Table 2 come from four sources: U.S. Census, Florida Department of Revenue (FDOR), Alachua County Property Appraiser (ACPA), and GRU. GRU represents a best-case utility where all parcel attribute data are known along with having billing data with separate indoor and outdoor meters for some of the accounts. Not all elements a_{ij} in matrix **A** are directly known for all utilities. A minimum of 20 specific attribute columns per parcel (attributes 1-20 in Table 2) are required to perform a bottom-up parcel level analysis. Additional attributes, if available, can improve the accuracy of the method, such as the GRU billing data. Fields 1-11 in Table 2 can be obtained directly for any parcel in Florida from Census or FDOR data. Fields 12-20 are necessary, but the availability varies by county appraiser. These fields can be estimated if the data are not directly available. Billing data can greatly enhance the analysis methodology by allowing for improved calibration of water usage estimates, but are not necessary to perform this analysis. Significant effort is required to link billing data to the other data sources (Friedman 2010). County property appraiser and billing data are added and updated on a case-by-case basis as data become available.

Table 2. Description of 46 attributes for the parcel-level database for 30,903 single family residences served by Gainesville Regional Utilities and 50,920 single family residences in Alachua County

Field(s)	Data source	Attribute	Scale	Definition	Period of record	Type
1	Census	Census ID	Block	Can be linked with other GIS compatible databases	2000	Spatial
2	Census/GIS	GIS geometry	Block	GIS geometry can be linked with FDOR GIS geometry	2000	Spatial
3	Census	Average household size	Block	Average for the entire block. May include mixed uses.	2000	Spatial
4	FDOR*	Parcel ID	Parcel	ACPA database includes FDOR ID	1920-2008	Spatial

5	FDOR	Use code	Parcel	Indicates which parcels are in the single family sector	1920-2008	Spatial
6	FDOR/GIS*	Parcel geometry	Parcel	GIS geometry can be linked with other GIS data	1920-2008	Spatial
7	FDOR	Effective year built	Parcel	Year property built or year of major renovation	1920-2008	Spatial
8	FDOR	JustValue Effective area	Parcel	The current (2008) value of a property	1920-2008	Spatial
9	FDOR	area	Parcel	The effective developed area of the property	1920-2008	Spatial
10	FDOR/GIS	Parcel area	Parcel	GIS calculated parcel area using DOR parcel geometry	1920-2008	Spatial
11	FDOR	Residential units	Parcel	Number of residential units per parcel	1920-2008	Spatial
12	FDOR	units	Parcel	Identification number that is linked to GRU database	1920-2008	Spatial
13	ACPA***	ID	Parcel	GRU database	1920-2008	Spatial
14	ACPA	Stories	Parcel	Number of stories per structure	1920-2008	Spatial
15	ACPA	Associated impervious area#	Parcel	Associated impervious area of a parcel	1920-2008	Spatial
16	ACPA	Gross area	Parcel	Gross area of the parcel	1920-2008	Spatial
17	ACPA	Bathrooms	Parcel	Number of bathrooms within a property	1920-2008	Spatial
18	ACPA	Heated area	Parcel	Heated area of a property	1920-2008	Spatial
19	ACPA	Inground irrigation system	Parcel	Yes or no	1920-2008	Spatial
20	ACPA/GIS	GIS geometry	Parcel	Linked with FDOR and GRU GIS databases	1920-2008	Spatial
21	ACPA	Inground pool	Parcel	Yes or no	1920-2008	Spatial
22	GRU****	Customer ID	Parcel	GRU database includes ACPA ID	1920-2008	Spatial
23-34	GRU	Dual meter tag	Parcel	Indicates a dual or single metered customer	1920-2008	Spatial
35-46	GRU	Irrigation meter water use	Parcel	One year of monthly data for irrigation meters	10/07-9/08	Temporal
		Regular meter water use	Parcel	One year of monthly data for regular meters	10/07-9/08	Temporal

*Florida Department of Revenue

**Geographic Information System

***Alachua County Property Appraiser

****Gainesville Regional Utilities

Sum of areas of garage, driveway, patio, screened in areas, balconies, sheds/barns, etc.

The FDOR attributes in the parcel level database are updated annually. Due to the accuracy and quality of these data, this process is straightforward. U.S. Census block data are updated every 10 years and do not require much work unless the census block boundaries have been reconfigured.

It is simple to link the FDOR and county property appraisers' parcel-level databases. However, the content of the county property parcel-level databases varies and the county-level databases must be acquired for each county. A demographic analysis was done for Alachua and Hillsborough counties that include the two benchmark utilities: Gainesville Regional Utilities (Alachua County) and Hillsborough County Water Resources Services (Hillsborough County). The ACPA database has a wealth of parcel-level information for water demand management studies, including the 10 spatial attributes shown in Table 2. The results from the analysis of the Alachua and Hillsborough county databases are used to estimate attributes for other areas that do not include these attributes. For example, most Florida counties provide information about the number of bathrooms at each single-family dwelling; however, that information is absent in some counties. In counties where the information is available, a relationship between the heated area of the home and the number of bathrooms was found to produce a reliable estimate that could be substituted for the missing data in other counties.

Using SFR data for Alachua (N = 50,920) and Hillsborough counties (N = 316,258), the number of bathrooms can be estimated as a function of the heated area of the parcel. The regression equation is

$$B = 0.000732796*HA + 0.766547642 \quad (R^2 = 0.545) \quad (1)$$

Where:

B = number of bathrooms per account

HA = heated area (ft²) per account.


The results are shown in Table 3 as a table lookup function with the square footage rounded to the nearest 50 ft².

Table 3. Default lookup table for estimating the number of bathrooms based on regression analysis of a sample of 367,178 single family residential parcels in Alachua and Hillsborough Counties

Heated area range		Number bathrooms per house
minimum ft ²	maximum ft ²	
0	650	1
651	1,350	1.5
1,351	2,000	2
2,001	2,700	2.5
2,701	3,400	3
3,401	4,050	3.5
4,051	4,750	4
4,751	5,450	4.5
5,451	infinity	5

The key indicator of size in the FDOR database is the effective area of the parcel, rather than heated area which is used to estimate number of bathrooms (Attribute 9 in Table 2). The effective area is not a physical area but is the heated area plus the associated impervious area multiplied by a weight that is less than 1. Fortunately, the county property appraisers report the heated area for each parcel. Thus, it is possible to estimate heated area as a function of effective area. The result for GRU is shown in Figure 1. The fit is excellent.

Figure 1. Relationship between effective and heated area for 30,903 single family residences in GRU

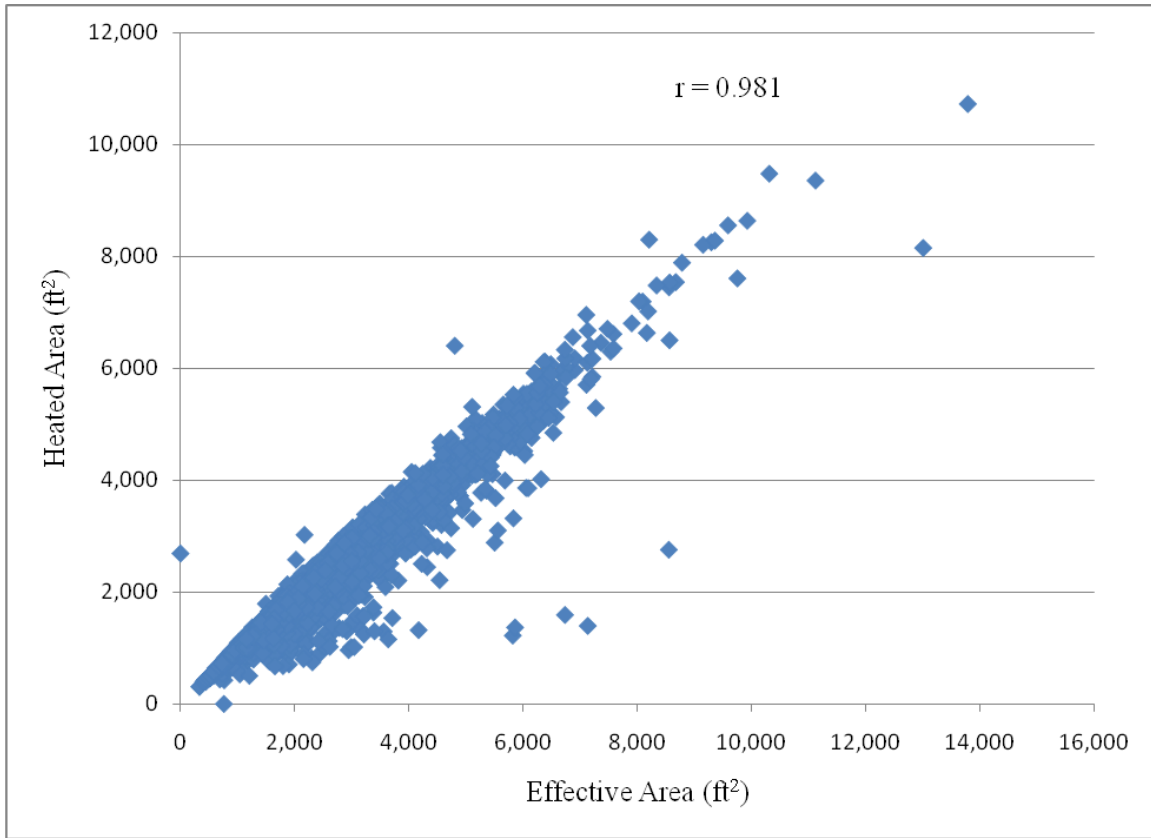


The HA/EA ratio for a single FDOR code, K_p , is calculated using equation 2.

$$K_p = \sum_i (HA_{ip} / EA_{ip}) \quad (2)$$

For, GRU, $K_p = 0.87$. K_p has been shown to be very consistent and stable throughout Florida for a given FDOR code (Morales 2010). Assuming $K_p=0.87$, Equations 1 and 2 can be used to estimate the heated area and number of bathrooms for any parcel within the single-family residential land use FDOR category in Florida.

Once the subset of matrix **A** is known for a given utility, a wide variety of analyses can be conducted. Due to the structure of the database, level of effort does not depend on the number of parcels selected in the analysis. Thus, the parcel level methodology described can be conducted for small utilities, large utilities, or large planning regions with the same level of effort. As an example analysis, the Clearinghouse statewide database provides the effective year built (Attribute 7 in Table 2) for all customers. The annual number of new accounts and the cumulative total SFR accounts for GRU are shown in Figure 2.


Figure 2. Annual new single family residential new and cumulative single family residential accounts of customers served by Gainesville Regional Utilities from 1920 to 2007

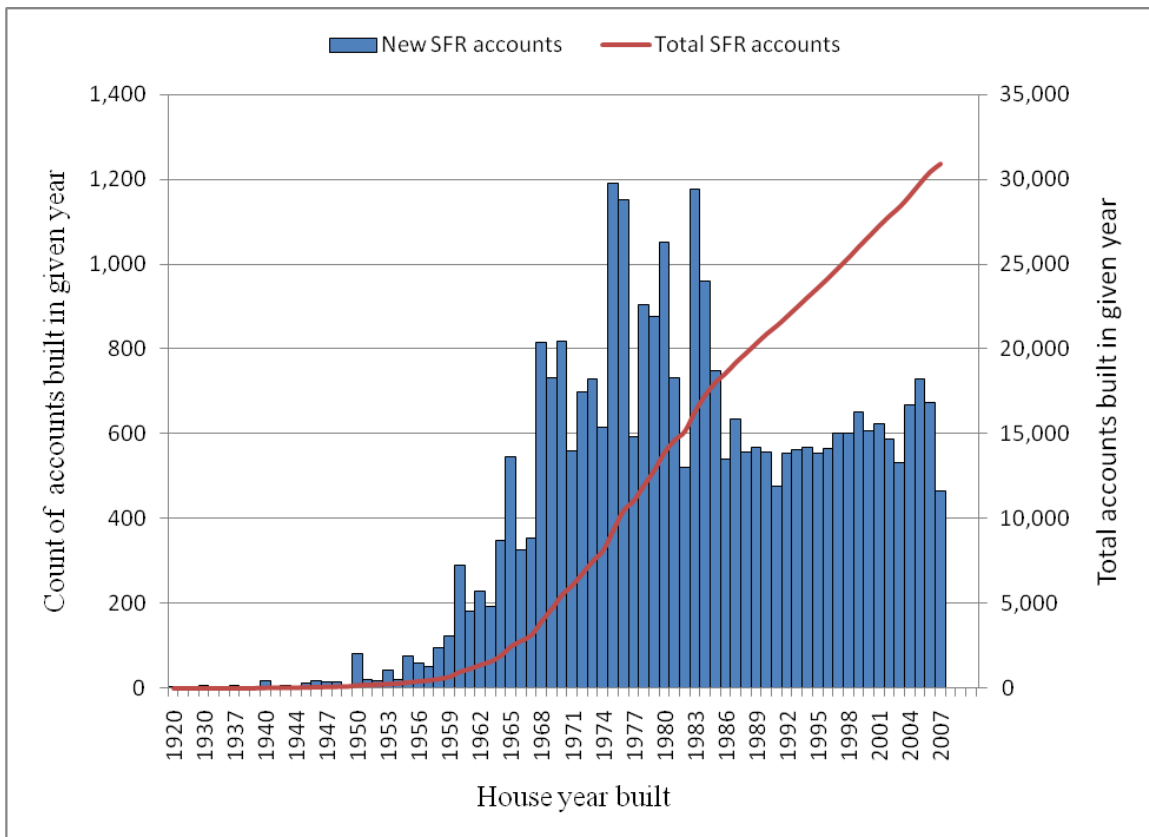

There were 30,903 SFR accounts as of 2007. The most rapid annual growth rates occurred from 1968 to 1985. The annual growth rate has remained steady since 1985 at

about 600 new customers per year. This annual time series data at the individual customer level provides an excellent basis for evaluating historic growth patterns and projecting future growth patterns. All calculations are done at the account level and the results are aggregated as needed. For example, the number of bathrooms per house for each five-year period is shown in Figure 3.

Figure 3. Trends in number of bathrooms per single family residence for 30,903 customers served by Gainesville Regional Utilities

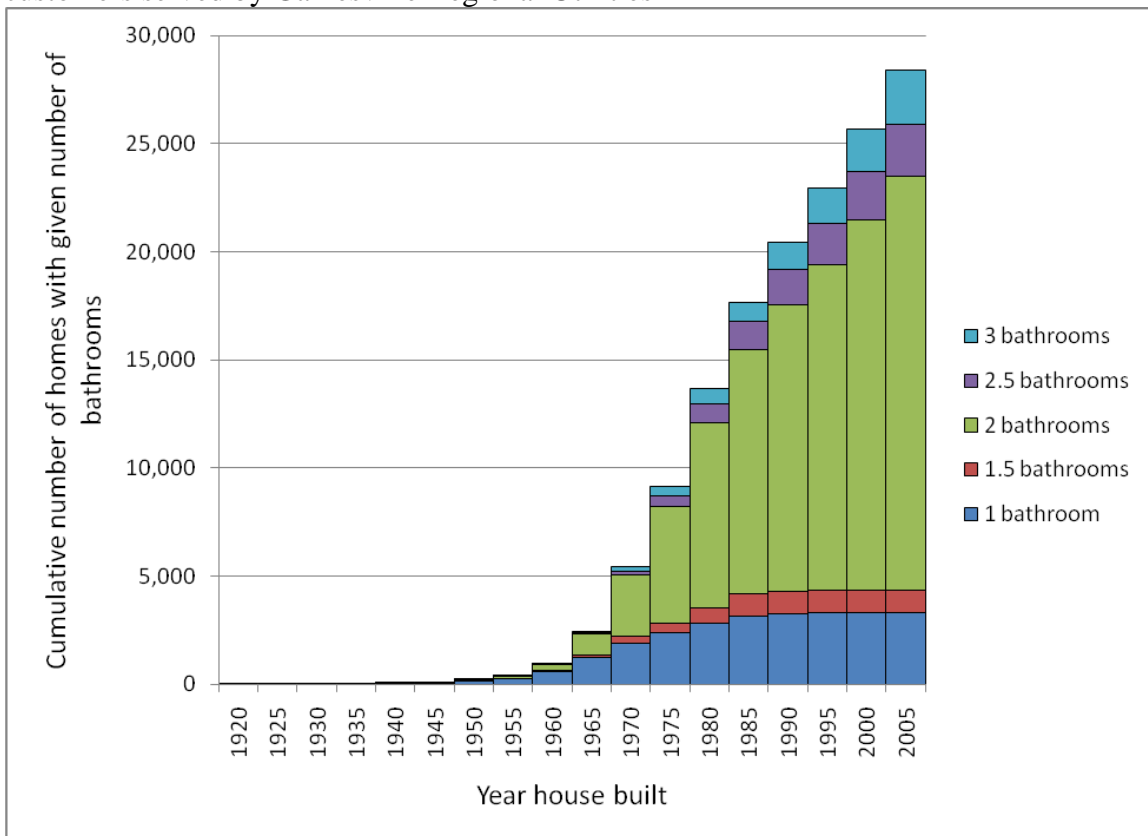

This information was generated using a data table based on Attribute 7 (effective year built) and Attribute 16 (number of bathrooms) in the GRU combined database.

Before 1970, the majority of new houses had only one bathroom. Since 1970, most houses have at least two bathrooms (Friedman 2010). The heated area of SFRs has also increased significantly from about 1,500 ft² in 1970 to 2,300 ft² in 2007. The number of people per house has remained constant since 1970. Thus, the number of people per

toilet has decreased from 1.8 in 1970 to 1.1 in 2007. This major decrease in people per toilet results in a proportionately lower utilization rate per toilet.

Key comparative statistics for these three periods for single-family residences served by GRU are shown in Table 4.

Table 4. Comparative summary statistics for 30,903 single family residences served by Gainesville Regional Utilities arranged by three historical periods

Statistic	Historical Analysis Period			Sum or weighted average
	Pre 1983	1983-1994	1995-present	
Count of SFR parcels	15,152	7,896	7,855	30,903
Percent of SFR parcels	49%	26%	25%	100%
Average daily gallons per account (10/07 - 09/08)	207	246	292	238
Coefficient of variation	0.17	0.24	0.26	0.22
Average effective year built	1972	1988	2001	1984
Average heated area, ft ²	1,657	1,811	2,171	1,827
Average just value, \$	\$ 154,544	\$ 201,087	\$ 275,104	\$ 197,080
Average persons per house	2.50	2.49	2.63	2.53
Average number of bathrooms	1.90	2.18	2.42	2.10
Average parcel area, ft ²	18,097	16,717	15,144	16,994
Average irrigable area, ft ²	14,958	12,982	11,109	13,475
Percent of accounts with sprinkler systems	9%	27%	61%	27%

This table provides valuable insights into the nature of residential water demand in Gainesville. Nearly half of the residences were built before 1983 when little attention was paid to water demand management, although some percentage of these homes likely has newer fixtures due to fixture replacement, as is explained in more detail in the next section. About 25% of the residences were built after 1994 and have water-saving indoor fixtures due to improved plumbing codes (Heaney et al. 2010). The average daily gallons per account has increased significantly from 207 for the pre-1983 residences to 292 for the post-1994 residences. While the newer homes are larger, the average persons per

house has remained stable at about 2.5 persons per house. The number of bathrooms per house has increased from 1.90 to 2.42 from Period 1 to Period 3. Thus, the fixture utilization rate has decreased. The average irrigable area has decreased by about 25% from Period 1 to Period 3. The most dramatic change across these three periods is the major increase in the use of in-ground irrigation systems. The use of in-ground irrigation systems appears to be the major reason why the average daily gallons per account is 292 for Period 3 and 207 for Period 1 residences.

SUBGROUPINGS OF SINGLE-FAMILY RESIDENTIAL ACCOUNTS

Based on trend analysis in the previous section, SFR accounts can be subgrouped separately depending on whether indoor or outdoor usage is being analyzed. The SFR indoor usage subgrouping methodology will be presented in this paper. SFR accounts are arranged into subgroups based on fixture efficiency (based on three discrete plumbing code periods) and number of bathrooms per residence (based on six discrete values) which reflect distinct indoor usage characteristics shown in the previous section. Three fixture efficiency periods reflect significant differences in SFR fixture water usage rates, frequency of use, and market penetration. Historical water use is summarized for the following three periods: pre-1983, 1983-1994, and 1995 to present. The pre-1983 period represents an uncontrolled situation when few conservation practices had been implemented. The period from 1983 to 1994 reflects the beginning of conservation programs and plumbing codes that reduced the allowable water use per event. The period from 1995 to present reflects the impact of much more proactive demand management practices. Rashid et al. (2010) summarize the wide variety of demand-management

initiatives that have been taken at the state and federal levels. Most of these activities have occurred during the past 20 years.

SFR accounts are divided based on six discrete number-of-bathrooms-per-account categories. Five values are recommended for the discrete baths per account values of 1, 1.5, 2, 2.5, and 3. The final value is for residences with more than 3 bathrooms. These residences are assumed to have an average of 3.5 bathrooms.

SFR accounts can be categorized into one of 18 subgroups, based on which of the three fixture efficiency periods and which of the six number-of-bathrooms-per-house categories it falls in. For example, accounts with fixtures reflective of those installed pre 1983 having 2 bathrooms would be grouped together. The total number of bathrooms for accounts in each of these 18 subgroups was determined for GRU based on property appraiser’s data and is shown in Table 5. This information is generated from the master data matrix using a pivot table that sums over the three fixture efficiency periods and the six bathroom values.

Table 5. Distribution of bathrooms in 30,903 GRU single family residential accounts as of the year 2008

Period	Total SFRs	Bathrooms					
		1	1.5	2	2.5	3	3.5*
Pre 1983	15,152	2,913	828	9,408	965	762	276
1983-1994	7,896	374	221	5,278	916	756	351
1995-2008	7,855	20	14	5,023	606	1,300	892
Total	30,903	3,307	1,063	19,709	2,487	2,818	1,519
% of Total	100.00%	10.70%	3.44%	63.78%	8.05%	9.12%	4.92%

*Residences with more than 3 bathrooms are assumed to have an average of 3.5 bathrooms.

GENERATION OF END-USE ESTIMATES

The number of bathrooms is the basic driver that determines the number of toilets and other fixtures per residence. The number of toilets per bathroom is found using Equation 3.

$$\text{Toilets} = \text{roundup}(\text{baths}, 0) \quad (3)$$

The Excel roundup function rounds up to the next integer.

The above information above can be combined to estimate the number of indoor fixtures. This procedure created 12 toilet subgroups, 3 clothes washer subgroups, 9 showerhead subgroups, and 12 faucet subgroups, creating a total of 36 subgroups based on fixture efficiency and number of bathrooms per house for indoor end-use analysis. This is a refinement of the initial 18 subgroups, where each home is now assigned to one subgroup for each of the four fixtures. Partitioning the total SFR customer base into these categories allows for much more accurate determination of SFR indoor water usage and how it varies. Dziegielewski and Opitz (2002) also suggest disaggregating customers into non-conserving, standard, and ultra-conserving classes. In addition, this methodology allows for selecting target groups to retrofit for a conservation plan.

To estimate the mix of each fixture for a particular year, one has to account for replacement of older fixtures. Knowing the effective year built and an assumed fixture service life for each of the SFR accounts, it is straightforward to calculate the mix of fixtures for any assumed scenario year. Initially, SFR accounts are classified into fixture subgroups by assuming fixture efficiencies based on the effective year built of the home.

Accounts are reclassified if a more efficient device is assumed to exist based on service life assumptions. Previous retrofit programs can be incorporated if specific accounts retrofitted can be identified. As an example, the estimated mix of toilets in 2008 in GRU, based on a service life of 40 years, is contained in Table 6. Estimates of service lives for a variety of end uses are available in National Association of Home Builders (2007), Maddaus (2009) and Green (2010).

Table 6. Number of toilets in the SFR category of GRU’s 30,903 customers in 2008 based on a toilet service life of 40 years.

Year Built Group	Total	Toilets/single family residence				Average Toilets/SFR
		1	2	3	4	
Pre 1983	23,088	1,306	16,358	4,488	936	2.22
1983-1994	18,128	553	11,130	5,037	1,408	2.40
1995-2008	25,626	1,448	14,056	6,390	3,732	2.48
Total	66,842	3,307	41,544	15,915	6,076	2.37
% of Total	100.00%	4.95%	62.15%	23.81%	9.09%	

WATER USE PERFORMANCE FUNCTIONS FOR TOILETS

Water use intensity depends on the number of persons per single-family residence. The persons per house is estimated using U.S. Census block level data that provide average values at an approximate scale of 50 to 100 residences. U.S. Census reports persons per residential dwelling unit. Sometimes this estimate is an average of single- and multi-family population densities for mixed use within a census block. Fortunately, census blocks can be divided into three categories: SFR only, Multi-family Residential (MFR) only, and SFR/MFR blends. For the SFR, the persons-per-residence estimate is calculated using Equation 4:

$$\text{Persons/SFR} = \text{Census block average for the nearest block that is SFR only.} \quad (4)$$

In most cases the nearest block is the block in which the parcel is located. The resulting

estimates of persons per residence are shown in Table 4. The persons per SFR has remained relatively constant during the three periods; thus utilizing Census reported persons per SFR is accurate, even though the data are available at 10-year intervals. However, the toilet utilization rate has decreased significantly because of the increasing number of toilets per SFR in recent years.

The next step is to estimate the daily usage per existing toilet. These results are shown in Table 7.

Table 7. Daily gallons per day per toilet

Period	Toilets/house				Toilet Attributes		Daily gallons/person
	1	2	3	4	Gallons / flush	Daily flushes/person	
Pre 1983	63.7	31.8	21.2	15.9	5	5.1	25.5
1983-1994	44.5	22.2	14.8	11.1	3.5	5.1	17.85
1995-2008	21.5	10.7	7.17	5.37	1.6	5.1	8.16


Additional input information is the attributes of toilets associated with each period. The gallons per flush and daily flushes per day are based on the results of the national SFR end-use evaluations and summaries of usage estimates in earlier periods (Mayer et al. 1999, Vickers 2001, Aquacraft, Inc. 2005). As shown in Table 7, the average daily gallons per person has decreased from 25.5 before 1983 to 8.16 after 1994 due to the reduction in gallons per flush from 5.0 to 1.6. The daily water use per toilet is based on the number of persons per toilet. These results show the combined effects of technological improvement in reducing the gallons per flush and the reduced number of people per toilet that results in a lower utilization rate.

Assume that it is desired to evaluate whether it is cost-effective to convert some or all of the above toilets to 1.28-gallons-per-flush (gpf) toilets. The daily flushes per

toilet are assumed to remain at 5.1. The savings from switching the existing toilets to the 1.28-gpf model are shown in Table 8 for each of the 12 categories. The savings vary widely from as high as 48.0 gallons per toilet per day to a low of 1.10 gallons per toilet per day. This way of calculating savings is a significant improvement over using a single savings rate for all toilets that provides no information regarding the pre- and post-conditions.

The information from Tables 6 and 8 can be combined to generate a performance function for replacing existing toilets with 1.28-gpf toilets. The results are shown in Figure 4.

Figure 4. Total savings performance function for changing to 1.28 gpf toilets

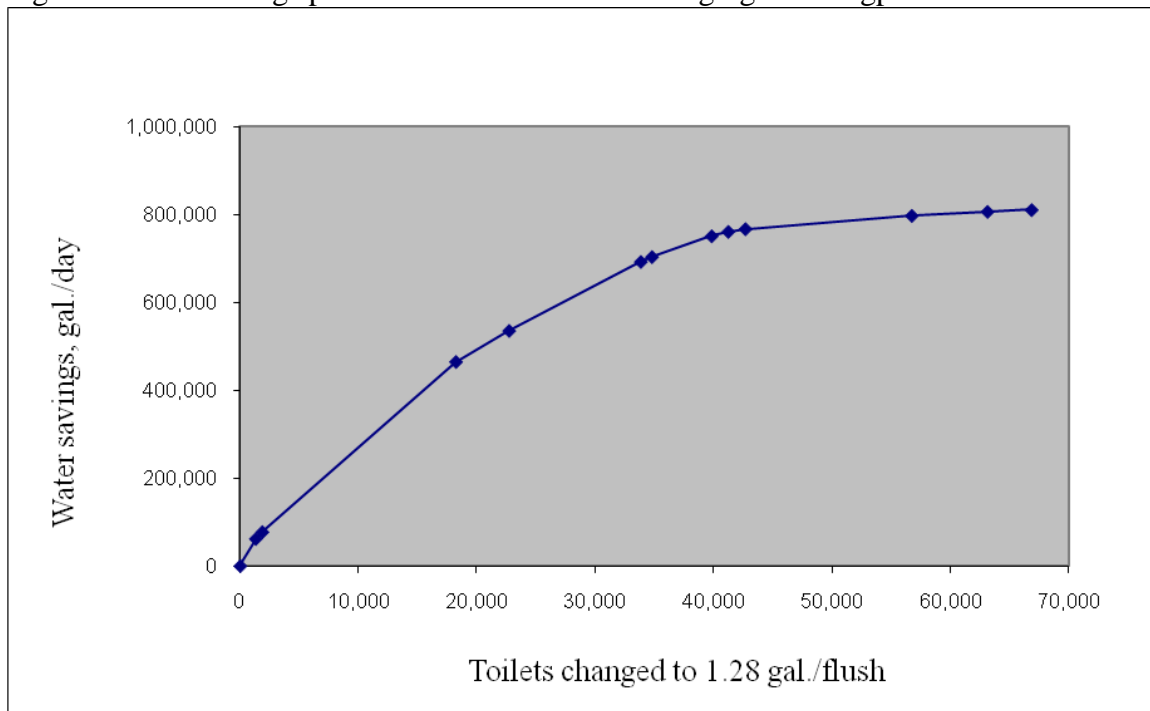

The performance function is generated by ranking the retrofit options from highest to lowest savings rates. By definition, this function exhibits diminishing marginal productivity since the savings rate decreases as the number of toilets retrofitted increases.

The slopes of each chord in the resulting piecewise linear function shown in Figure 4 are the water savings rates from Table 8.

Table 8. Daily water savings if all customers use 1.28 gallon per flush toilets

Period	Toilets/ single family residence			
	1	2	3	4
Pre 1983	47.4	23.7	15.8	11.8
1983-1994	28.2	14.1	9.41	7.05
1995-2008	4.30	2.15	1.43	1.07

OPTIMAL TOILET REPLACEMENT POLICY

Given the performance function for toilet retrofits (Figure 4), the unit cost of a toilet retrofit per day of service life (c) and the associated unit utility savings (p), it is possible to find the optimal number of toilets to change to 1.28-gpf models in this illustration. This problem can be formulated as a linear program to maximize net benefits as follows:

$$\text{Maximize } Z = p*y - c*x$$

Subject to:

$$y = \sum_j a_j x_j \tag{5}$$

$$x_j \leq (x_j)_{\max}$$

$$x_j \geq 0$$

Where: Z = total benefits – total costs, \$/day

p = value of water saved, \$/gallons

y = quantity of water saved, gallons/day

c = unit cost of a 1.28 gpf toilet, \$/day

a_j = savings rate for the j^{th} chord in the piecewise linear function, gallons/toilet/day

x_j = number of toilets in the j^{th} category with an upper bound of $(x_j)_{\text{max}}$

A linear program has been set up within EZ Guide 2 to automatically find the optimal blend of demand-management options. The value of water saved and unit cost parameters are determined case by case for individual utilities. The value of water saved can include several benefits seen by the utility, including avoided production cost, avoided expansion or alternative sources, etc. Groves et al. (2008) describe categories of savings that can be included depending on the accounting stance of the utility. The unit cost is based on the present value of the initial replacement cost, factoring in installation costs, rebate programs, etc. and the estimated operating costs over the service life of the end-use device. This formulation extends the linear program detailed above to simultaneously find the optimal blend across all demand-management options. Lund (1987) used linear programming to find the mix of conservation options that could reduce or eliminate the need for expanding the supply system. Lee et al. (2005) use production function theory to find the optimal blend of land-use adjustments and stormwater BMPs to satisfy low-impact-development stormwater goals. Rosenberg (2007) uses probability theory to derive a normalized performance function for evaluating conservation options. Griffin (2006) presents a general overview of production economics and how water systems can be optimized. Baumol (1977) describes how production economics problems can be solved using linear programming. It is also possible to solve this optimization problem by fitting an equation to the production function and finding the value of x such that

$$dy/dx = c/p \quad (6)$$

Where dy/dx = slope of the production function and c and p are defined above.

In this case the maximum net benefits are \$1,438 per day that will save 762,000 gallons of water per day by converting 41,216 older toilets from residences with fewer toilets per residence.

EZ Guide 2 also allows other formulations of the decision problem, including maximizing the amount of water saved for a given budget or minimizing the cost of meeting a performance goal, e.g., gross gpcd \leq 100. (See Heaney et al. (2010) for a description of Florida definitions of gpcd). Economic optimization is not the only consideration in selecting the preferred alternative. Maddaus and Maddaus (2006) show how to set up a scoring matrix that incorporates non-economic factors.

Is 1.28 gpf the best toilet retrofit option? In the illustrative example presented above, only a 1.28-gpf toilet was considered as the retrofit option. However, depending on the water savings rates and the relative savings and control costs, other toilet gpf options may be better. The linear program in EZ Guide 2 finds this best blend of 1.6-, 1.28-, 1.1-, and 0.8-gpf toilets. The 0.8- and 1.1-gpf toilets are more expensive but save more water whereas the 1.6 gpf toilet is less expensive but saves less water. The linear program was run for the unit cost of the four toilet options being \$100 (1.6 gpf), \$150 (1.28 gpf), \$200 (1.1 gpf), and \$300 (0.8 gpf). The results are shown in Table 9. If a single gpf value is used, the net benefits are largest if 1.6-gpf toilets are used. The 1.28-gpf option has lower net benefits. The net benefits are maximized by using a blend of 0.8- and 1.6-gpf toilets. These preliminary linear programming solutions and associated sensitivity analysis provide valuable insights into the best blends within and among end-use options.


Table 9. Net benefits and water saved by retrofitting toilets to a single flush rate or the optimal blend of flush rates

Option	Net benefits \$/day	Daily 1,000 gal. saved
1.6 gpf only	\$ 1,484	683
1.28 gpf only	\$ 1,438	762
1.1 gpf only	\$ 1,295	795
0.8 gpf only	\$ 1,459	1,052
All options*	\$ 1,564	997

*Optimum is blend of 1.6 and 0.8 gpf

Location of priority retrofits. The databases described in Table 2 include GIS spatial information that allows the results to be presented in terms of the location of the more promising parcels to retrofit. Illustrative results for toilets and irrigation systems in single family residences in Gainesville are shown in Figure 5. The spatial clustering indicates the priority areas. In this case the priority toilet retrofit areas are in the older sections of the city with smaller houses, fewer bathrooms, and older fixtures. The priority irrigation areas are the newer homes that have in-ground sprinkling systems.

Figure 5. Illustrative map showing the priority parcels for toilet and irrigation single family residential retrofits, Gainesville, Florida

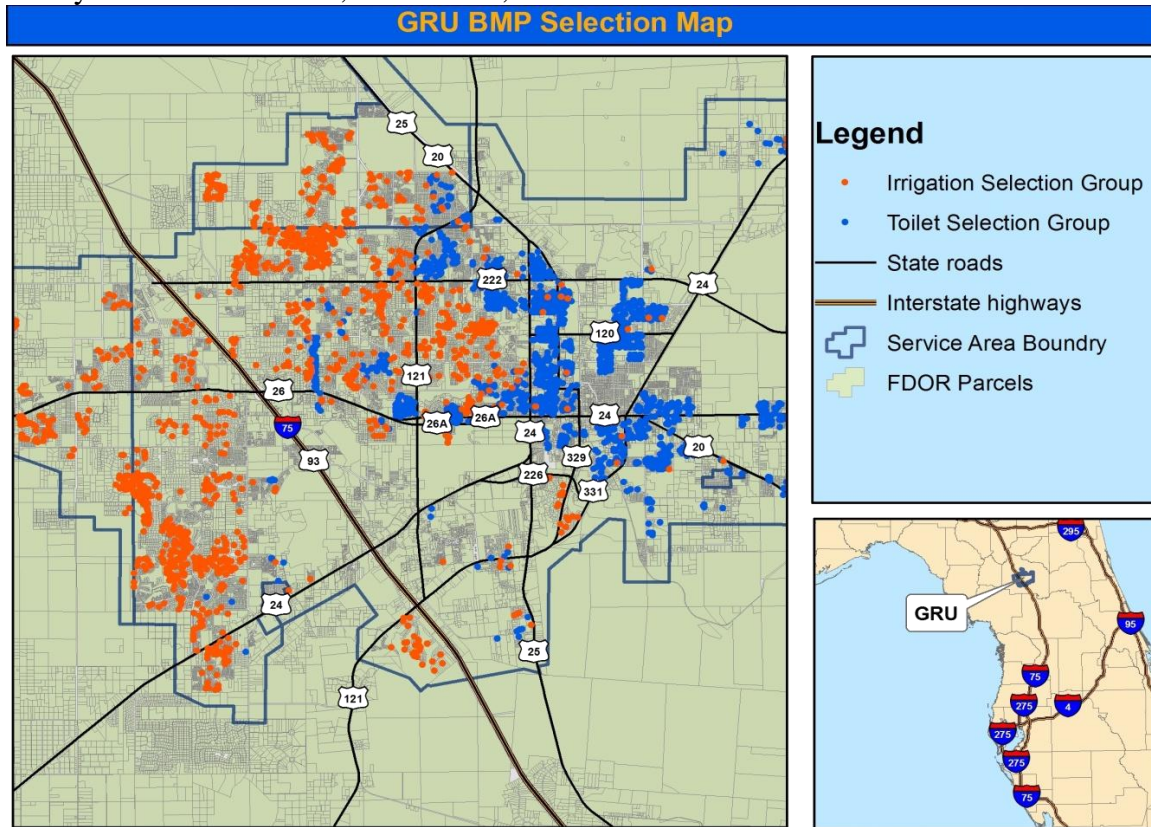

SUMMARY AND CONCLUSIONS

Acceptance of water demand management as a viable alternative to traditional supply augment options has been limited due to concern that the estimated savings might not materialize. The recent availability of accurate measurements of indoor end use patterns and accurate parcel-level information about customer attributes and historical water use patterns is making it possible to develop reliable estimates of the savings from demand management. Government in the sunshine legislation in Florida has made it possible to obtain accurate information on parcel attributes for every one of the state's 8.8 million parcels. Also, parcel-level water use data are available for selected utilities that

have linked the parcel attribute and customer billing databases. The Conserve Florida Water Clearinghouse has used this unusual, if not unique, information to develop bottom-up water demand management decision support system for utilities within the state. This paper shows how this information can be used to develop performance functions for each end use and combine this information with savings and cost data to develop a linear program that can find the optimal demand management program that describe the optimal blend of the intensity of the option, .e.g., 1.28- vs. 0.8-gpf toilets, as well as across options, e.g., toilets vs. clothes washers. This entire procedure is programmed into EZ Guide 2, which provides Florida water utilities with a unique analysis tool driven by a uniform statewide database. Interested utilities can obtain these data sets already loaded into the EZ Guide 2 software. Output from this evaluation provides new insights into the opportunities and challenges of demand management. The approaches outlined in this paper provide a solid basis toward planning and allocating resources toward targeted conservation technology changes. Follow-up steps include implementing and evaluating actual water savings. These results can then be used to improve the next iteration of the model run. Utilities outside of Florida should find this information and approach of value because EZ Guide 2 includes default equations or lookup tables to estimate important parameters if detailed data are unavailable.

ACKNOWLEDGEMENTS

We appreciate the cooperation of Gainesville Regional Utilities and Hillsborough County Water Resources Services in providing access to their customer level databases. Primary financial support for the Clearinghouse has come from the Florida Department of Environmental Protection and the South Florida, St. Johns River, and Southwest Florida

Water Management Districts. The methods in EZ Guide 2 are still being evaluated in the beta testing and have not been approved as policies of these funding agencies. Comments by the reviewers were very helpful in improving this paper.

ABOUT THE AUTHORS

Kenneth R. Friedman is a doctoral student for the Conserve Florida Water Clearinghouse (CFWC) in the Department of Environmental Engineering Sciences at the University of Florida, 424 Black Hall, University of Florida, Gainesville, FL, 32611; kick5@ufl.edu. He has a bachelor's and a master's degree in environmental engineering from the University of Florida. James P. Heaney is the principal investigator of the Conserve Florida Water Clearinghouse and a professor of water resources and environmental engineering at the University of Florida. Miguel Morales is a doctoral student with the CFWC. John Palenchar is an environmental engineer with the Florida Department of Environmental Protection.

REFERENCES

- Aquacraft, Inc. 2005. Water and Energy Savings from High Efficiency Fixtures and Appliances in Single Family Homes. US EPA Combined Retrofit Report.
- Baumol, W.J. 1977. Economic Theory and Operations Analysis, 4th Ed., Prentice-Hall, Englewood Cliffs, NJ
- Chen, L. 1994. Modeling housing and demographic diversity at census tract versus block group levels of aggregation. *Urban and Regional Information Association Journal*, 6:1:11.

Dziegielewski, B., Kiefer, J., Opitz, E., Porter, G., Lantz, G., DeOreo, W., Mayer, P., & Nelson, J. 2000. *Commercial and Institutional End Uses of Water*, AwwaRF, Denver, CO

Dziegielewski, B. & Opitz, E. 2002. Water Demand Analysis. Chapter 5 in Mays, L. Ed. *Urban Water Supply Handbook*, McGraw-Hill, NY

Friedman, K. 2009. Evaluation of Indoor Urban Water Use and Water Loss Management as Conservation Options in Florida. M.E. Thesis, Dept. of Environmental Engineering Sciences, U. of Florida, Gainesville, FL.

Friedman, K., Heaney, J., Morales, M., & Switt, R. 2010. Water Use and Demand Management Options for the Multi-Family Sector. Proc. 2010. Florida Water Resources Conference, Orlando, December.

Green, D. 2010. Water Conservation for Small and Medium Sized Utilities. AWWA, Denver, CO

Griffin, R. 2006. *Water Resource Economics*. MIT Press, Cambridge, MA

Groves, D., Griffin, J., & Hajiamiri, S. 2008. Estimating the Value of Water-Use Efficiency in the Intermountain West. RAND Corporation.

Hazen and Sawyer & PMCL. 2004. The Tampa Bay Water Long-term Demand Forecasting Model. Final Report to Tampa Bay Water, Clearwater, FL.

Heaney, J., Friedman, K., Morales, M., & Palenchar, J. 2010. Water Conservation Evaluations within the Context of Regional Water Supply Planning in Florida. Proc. 2010. Florida Water Resources Conference, Orlando, December.

Lee, J., Heaney, J., and Lai, F. 2005. Optimization of integrated urban wet-weather control strategies. *Jour. Water Resources Planning and Management*, 131:4:307.

Lund, J. 1987. Evaluation and scheduling of water conservation. *Jour. Water Resources Planning and Management*, 113:5:696.

Maddaus, W., & Maddaus, M. 2004. Evaluating water conservation cost-effectiveness with an end use model. Proc. 2004 Water Sources Conference, AWWA, Austin, TX, January.

Maddaus, W. & Maddaus, L. 2006. Water Conservation Programs-A Planning Manual. American Water Works Association Manual of Water Supply Practices M52, AWWA, Denver, CO.

Maddaus, W. 2009. Conservation Technical Analysis. Memorandum to East Bay Municipal Utility District, 40 p.

http://www.ebmud.com/sites/default/files/pdfs/Conservation_Memo.pdf

Mayer, P., DeOreo, W., Opitz, E., Kiefer, J., Dziegielewski, B., Davis, W., & Nelson, J. 1999. *Residential End Uses of Water*. Awwa Research Foundation, Denver, CO

Morales, M. 2010. Parcel-level Methodology for Estimating Commercial, Industrial, and Institutional Water Use. M.E. Thesis, Dept. of Environmental Engineering Sciences, U. of Florida, Gainesville, Fl.

National Association of Home Builders. 2007. *Study of the Life Expectancy of Home Components*.

Polebitski, A. & Palmer, R. 2010. Seasonal residential water demand forecasting for census tracts. *Jour. Water Resources Planning and Management*, 136:1:27.

Rashid, M., Maddaus, W., & Maddaus, M. 2010. Progress in US water conservation planning and implementation-1990-2009. *Jour. AWWA*, 102:6:85.

Rosenberg, D. 2007. Probabilistic estimation of water conservation effectiveness. *Jour. Water Resources Planning and Management*, 133:1:39.

Smith, S., Nogle, J., & Cody, S. 2002. A regression approach to estimating the average number of persons per household. *Jour. Demography*, 39:4:697.

Vickers, A. 2001. *Handbook of Water Use and Conservation*. Water Plow Press, Amherst, MA

White, S., Milne, G., & Riedy, C. 2004. End use analysis: issues and lessons. *Water Supply*, 4:3:57.